

## 仕様

屈折率	1.50
比重	1.35
アッペ数	59
設計	非球面
外/内径	67 mm/43 mm


## 対応コート

- ノンコート
- ハード
- ハードマルチ
- つるつる

## 製作範囲表

度数 (+)	球 面	乱視(+)																									
		0.25	.50	.75	1.00	.25	.50	.75	1.00	.25	.50	.75	1.00	.25	.50	.75	1.00	.25	.50	.75	1.00	.25	.50	.75	1.00		
3.00																											
.25																											
.50																											
.75																											
4.00																											
.25																											
.50																											
.75																											
5.00																											
.25																											
.50																											
.75																											
6.00																											
.25																											
.50																											
.75																											
7.00																											
.25																											
.50																											
.75																											
8.00																											
.25																											
.50																											
.75																											
9.00																											
.25																											
.50																											
.75																											
10.00																											
.25																											
.50																											
.75																											
11.00																											
.25																											
.50																											
.75																											
12.00																											
.25																											
.50																											
.75																											
13.00																											
.25																											
.50																											
.75																											
14.00																											
.25																											
.50																											
.75																											
15.00																											
.25																											
.50																											
.75																											
16.00																											

67

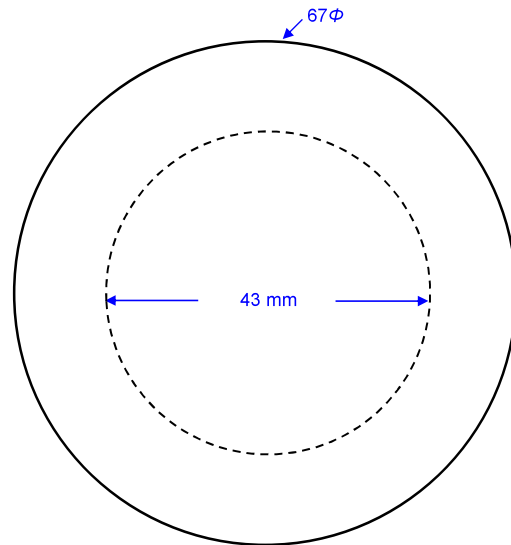

## カラー

アリアーテ	○	
レイバン G15・G31・#3	○	
見本色	○	
リラックス	×	

## 特殊加工

外径指定	×	
プリズム	○	※1
偏心	×	
カーブ指定	×	
UVカット	○	※2
厚み指定	×	
玉型カット	○	※3
スライス加工	×	

※1 (+) C= +3.00まで 3△まで可  
 (+) C= +3.50まで 2△まで可  
 (+) C= +4.00まで 1△まで可

※2 UV400  
 ノンコートは不可

※3 プリズムあり不可

原産国

日本