

C65-40

C65-40

プラスチック

キャタラクト

球面

1.50

仕様

屈折率	1.50
比重	1.32
アッベ数	59
設計	球面
外/内径	65 mm/40 mm


対応コート

- ノンコート
- ハード
- ハードマルチ
- つるつる

製作範囲表

度数 (+)	球 面	乱視(+)															
		0.25	.50	.75	1.00	.25	.50	.75	1.00	.25	.50	.75	1.00	.25	.50	.75	1.00
2.00																	
.25																	
.50																	
.75																	
3.00																	
.25																	
.50																	
.75																	
4.00																	
.25																	
.50																	
.75																	
5.00																	
.25																	
.50																	
.75																	
6.00																	
.25																	
.50																	
.75																	
7.00																	
.25																	
.50																	
.75																	
8.00																	
.25																	
.50																	
.75																	
9.00																	
.25																	
.50																	
.75																	
10.00																	
.25																	
.50																	
.75																	
11.00																	
.25																	
.50																	
.75																	
12.00																	
.25																	
.50																	
.75																	
13.00																	
.25																	
.50																	
.75																	
14.00																	
.25																	
.50																	
.75																	
15.00																	
.25																	
.50																	
.75																	
16.00																	
.25																	
.50																	
.75																	
17.00																	
.25																	
.50																	
.75																	
18.00																	

65

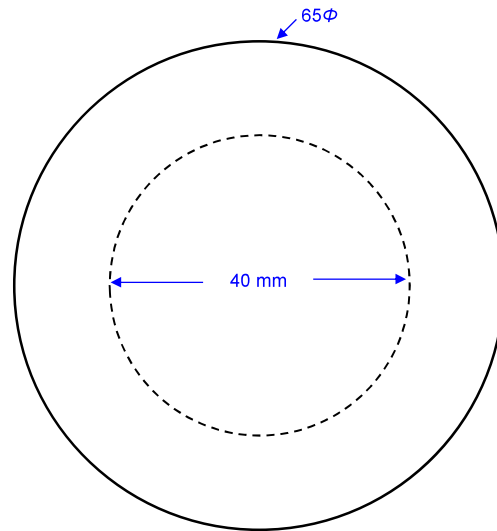

カラー

アリアーテ	○	
レイバン G15・G31・#3	○	
見本色	○	
リラックス	×	

原産国

日本

特殊加工

外径指定	○	※1
プリズム	○	※2
偏心	×	※3
カーブ指定	×	
UVカット	○	※4
厚み指定	×	
玉型カット	○	※5
スライス加工	×	

※1 68mm指定可（プリズム併用不可）

※2 (+) C = +3.00まで 3△まで可
(+) C = +4.00まで 2△まで可

※3 (プリズム換算) 3△まで可

※4 UV400
ノンコートは不可

※5 プリズムあり不可